


TERMINAL CONTAINING SYSTEM

Publication number: JP4027238 (A)
Publication date: 1992-01-30
Inventor(s): OSATO YASUHIRO; MATSUSHITA ATSUSHI
Applicant(s): OKI ELECTRIC IND CO LTD
Classification:
- **International:** **H04L12/28; H04L12/28;** (IPC1-7): H04L12/28
- **European:**
Application number: JP19900131393 19900523
Priority number(s): JP19900131393 19900523

Abstract of JP 4027238 (A)

PURPOSE:To preferentially contain the radio terminal in a radio base station whose receiving level is the highest by executing a response by the radio base station after holding for a prescribed time corresponding to a signal level of a received containing request. **CONSTITUTION:**According to this system, plural radio base stations 6A, 6B and 6C are connected mutually through a wire network 1, and each base station 6A, 6B and 6C contains an arbitrary terminal 7 in plural radio terminals 7. When one terminal 7 transmits a containing request to the base stations 6A, 6B and 6C, each base station 6A, 6B and 6C executes a response after holding for a prescribed time corresponding to a signal level of a received containing request, and the terminal 7 is contained in the base station which executes a response first. Also, each base station 6A, 6B and 6C transmits simultaneously a containing declaration to other radio base stations at the time executing a response to the containing request of one terminal 7, and other radio base station which receives the containing declaration stops a response to the same containing request, by which a competition of a radio circuit can be prevented.

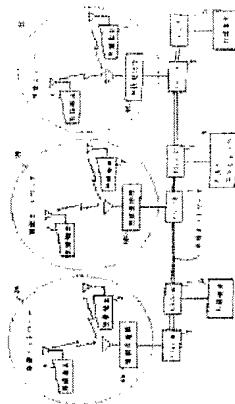

Data supplied from the **esp@cenet** database — Worldwide